Specifications

Front view illustrating Width & Height

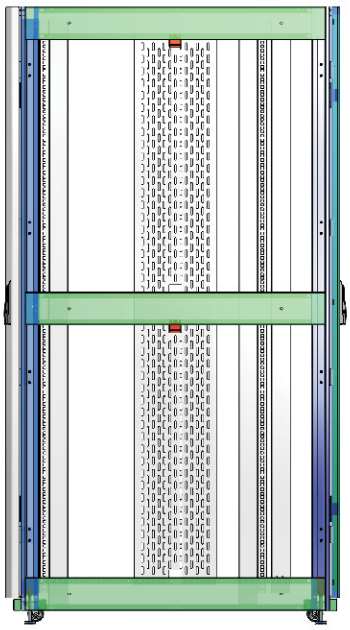

Side view

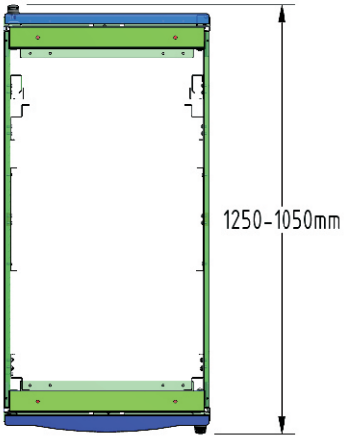

Top view illustrating Depth

Specification:	Description:
Cabinet Structure:	2.0mm Prime Quality Cold Rolled Mild Steel
Cabinet Doors:	1.2mm Prime Quality Cold Rolled Mild Steel
Finish:	Anti-Rust Pre-Treated, then Powder Coated
Colour:	Matt Black Txt 69-4200
Available Heights:	47U, 43U
Available Depths:	1200mm, 1000mm
Availale Widths:	600mm
Standard door:	Honeycomb perforated front and rear doors
Side doors:	1 x door set supplied standard, Horizontal Split, Removeable, Optional locking
Locking Mechanism:	4-point Roller Latch locking system.
Hinge System:	Easy-lift off system, self- aligning, 120 degree opening angle
Ventilation:	80% Air flow capacity, Through ventilation, Front and Rear perforated doors
Cable entry points:	Top & bottom multiple entries
Brush Panel entry points:	Top & bottom - 4 brush entries
Cable management:	2 x 300mm Cable Trays, 2 x Rear ring-run panels
Casters and feet:	4 swivel castors and 4 leveling feet supplied standard
Power options:	10 Way PDU, I.E.C PDU
Static load limit:	1000kg's
Mobile load limit:	400kg's
Profiles:	4 Punch Profiles with numbering
Screw sets:	Supplied with cabinet
Warrantee:	1 Year Warrantee on all metal work & paint work
Compliance:	ISO 9001, EIA 310-D, IEC 60297, DIN 41494 SC48D